



RC3 BURGLAR-RESISTANT THERMALLY BROKEN ALUMINUM FIXED WINDOW


This technical data sheet relates to a burglar-resistant aluminum fixed window whose construction complies with applicable European standards. This fixed window is custom-made, with numerous possible designs and a powder-coated finish. It is therefore suitable for the needs of various sectors.

SYSTEM DESCRIPTION

PROFILE

- Thermally broken aluminum profile
- Construction depth: 70 mm
- Face width: 55 mm

CONFIGURATIONS

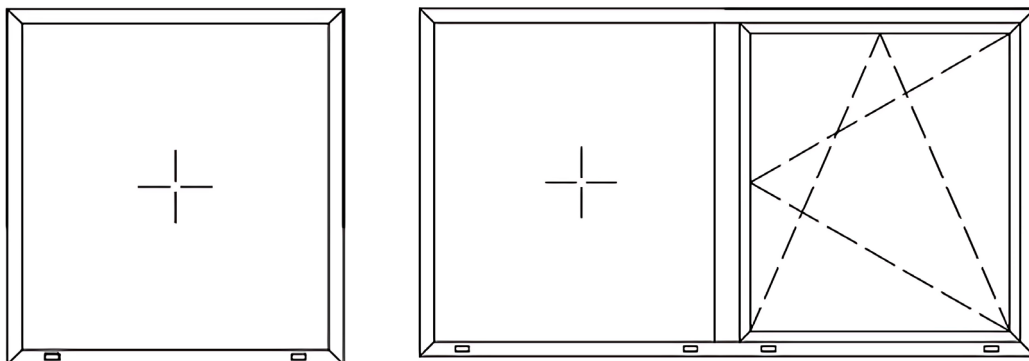

DIMENSIONS/WEIGHT MIN/MAX

- Minimum dimensions: 150 x 250 mm
- Maximum dimensions: depending on the maximum dimensions of the glass

FINISHING

Powder coating in standard RAL color

FILLING


- Glazing
 - Single or double burglar-resistant glazing class P5A according to EN 356, total thickness 15 to 54 mm
 - Snap-in glazing beads
 - Installation with an EPDM rubber seal

SPECIFICATIONS

PERFORMANCE RATINGS	
Burglar Resistance	Class RC3 according to EN 1627

ADDITIONAL PERFORMANCE RATINGS	
Thermal Insulation	Uw starting from 1 W/m ² K* according to EN ISO 10077-2
Wind Load Resistance	Class C5 according to EN 12210
Watertightness	Class E1200 according to EN 1027 and 12208
Air Permeability	Class 4 according to EN 12207

* May vary depending on the size and composition of the whole. Follow the recommendations of the profile system manufacturer.

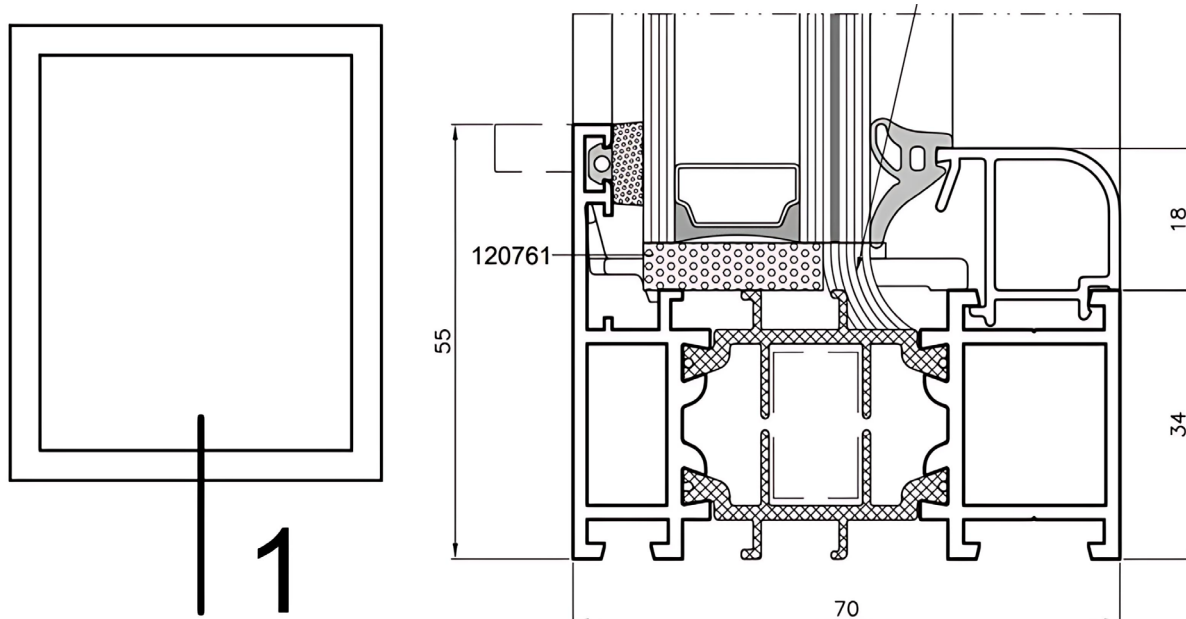

CERTIFICATION

OTHER PRODUCT TYPES WITHIN SECURITEQ

